



Company Profile

Est. 2021

High-Quality Hexagon Briquette

From Indonesia to Türkiye



Email

turkiye@sinarpacificint.com



Telephone

+90 534 576 6832



Website

PT SINAR PACIFIC INTERNATIONAL

Established in 2021, PT SINAR PACIFIC INTERNATIONAL is an independent owned manufacturer located in Demak/Jawa Tengah, Indonesia

- | | |
|--|---|
| 1. COMPANY NAME | : PT. SINAR PACIFIC INTERNATIONAL |
| 2. OFFICE | : Rukan Tanjung Mas Raya Blok B 1 No 9
JL. Raya Lenteng Agung RT 002 RW 001, Tanjung Barat
Jagakarsa, Jakarta Selatan 12530
Indonesia
Tel No. +90 534 576 6832
Fax. +62 21 - 78845040
turkiye@sinarpacificint.com |
| FACTORY | : Jl PLN Dukuh Karangmalang RT 04 RW 03
Kelurahan Gemulak, Kecamatan Sayung, Kabupaten Demak
59563 Jawa Tengah Indonesia |
| 3. ESTABLISHMENT | : April 29, 2021 |
| 4. DIRECTOR | : Mr. Muhammad Fathi Salsabila
Mrs. Erni Petrolia |
| 5. TURKIYE SALES REPRESENTATIVE | : Mevlüt Erkol |
| 6. MAIN PRODUCT | : Bio Wood Log (Sawdust Charcoal Briquette) |
| 7. MARKET | : Türkiye, Middle East, Europe, Asia, Australia |

8. **CAPACITY** : 6 x 40'HC/Month, Loading + 27 ton/container
9. **PRODUCTION CAPACITY** : 270 tons / month
10. **EMPLOYEE** : +- 100 Employee
11. **WORKING AREA** : +- 3.633 m2
12. **BANK REFERENCE** : Bank UOB, Bank BCA
13. **VISION** : To be the biggest charcoal manufacture and provider in the region
14. **MISSION** :
- Deliver excellence through customer-focused business practices
 - Implement best standards to secure premium quality.
 - Uphold sustainability and responsible environmental practices
 - Generate long-term value for all stakeholders
 - Focus on human resource as the center of company growth
16. **COMPANY BUSINESS IDENTIFICATION NUMBER (NIB)** : 1221000533012


BRIQUETTE GRADES



GRADE A

Length: 20 – 40 cm

Burning Duration: 4 – 6 hours

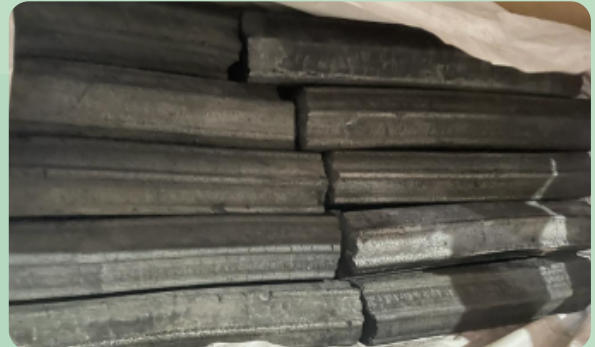

GRADE B

Length: 15 – 30 cm

Burning Duration: 3 – 4 hours



GRADE C

Length: 10 – 25 cm

Burning Duration: 2 – 3 hours



GRADE D

Length: Not consistent

Burning Duration: < 2 hours

Sawdust Charcoal – Production Process



SAWDUST CHARCOAL

Premium grade sawdust material
Legally and sustainably sourced



SAWDUST MIXING AND FERMENTATION

binding strength and material consistency. for
better density and longer burning performance

Burn 4 hours



PROCESSING MACHINE

Precision controlled process for uniform density



AFTER PROCESSED & COMPRESSED

Compressed into uniform, high-density
hexagonal briquettes.



BRIQUETTES BINDING PROCESS



READY FOR FURNACE DRYING

To ensure optimal quality



CHARCOAL FURNACE

to ensure optimal moisture levels, structural integrity, and consistent burning performance.



COOLING

Naturally cooled for stability and safe handling



BRIQUETTE GRADING

Briquettes are controlled and sorted according to grade.



PACKAGING



PACKAGING



WEIGHING




WEIGHING

Products are accurately weighed to ensure consistency and compliance with specifications.



Briquette storage in warehouse

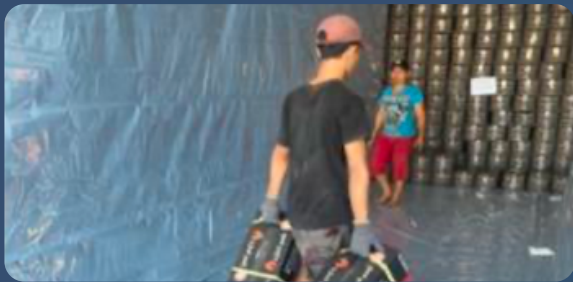

CONTAINER LOADING PROCESS

Container is fitted with protective lining and moisture control measures to ensure safe transportation.



VOID SPACE AT THE TOP

Minimum 30cm void space is maintained at the top to allow ventilation and ensure safe transport.



VIEW OF LOADED CONTAINER



SEALING OF CONTAINER

The container is securely sealed to ensure cargo safety and integrity during transit.

PRODUCT SPECIFICATION FOR SAWDUST CHARCOAL

1. General Information

- Product Name : Sawdust Charcoal Briquettes
- Shape : Hexagonal (with center hole)
- Raw Material : 100% Sawdust (Hardwood only)
- Color : Black

2. Physical Properties

- Ash Residue : 4-7%
- Fixed Carbon : > 8.5%
- Moisture : 5%
- Volatile : ≤8%
- Burning Time : 4-6 hours

No visible smoke, Odorless, No spark

3. Packaging

- Inner : Plastic / PP bag
- Outer : Carton box / Kraft bag
- Net Weight : 5 kg / 10 kg (customizable)